

HORIZONTAL TYPE BATCH OFF




+66 34 854716 to 7

www.yfm.co.th



MACHINE SPECIFICATION

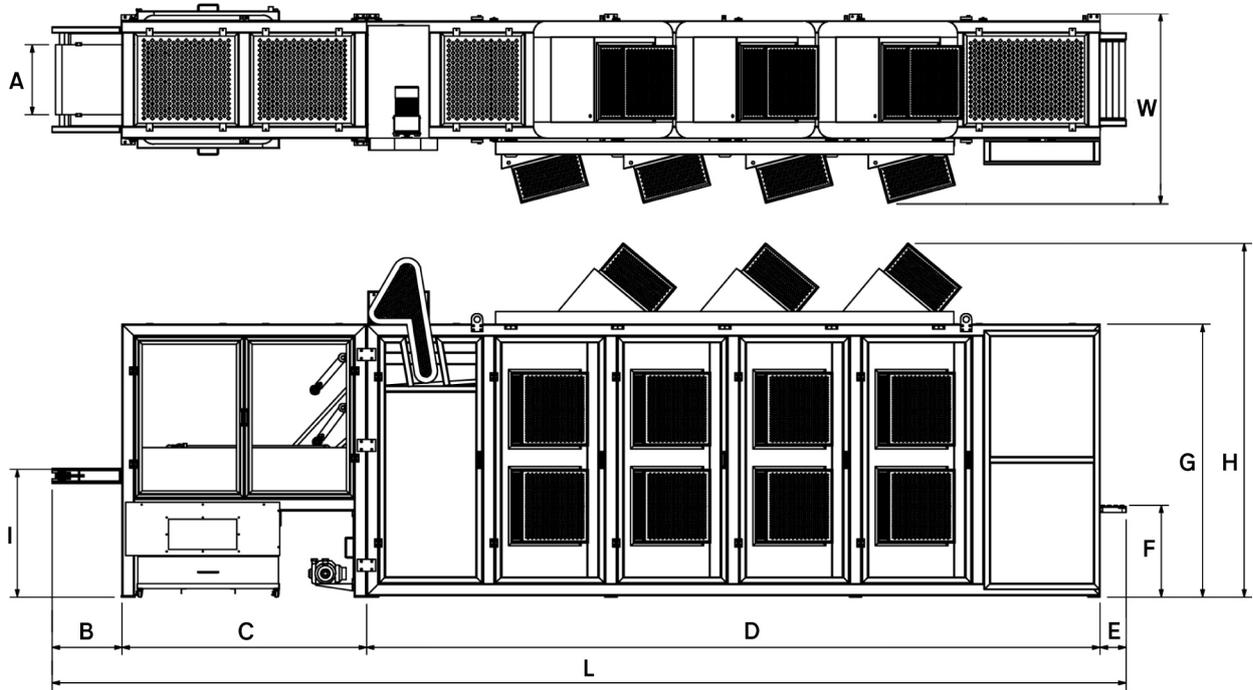

Overview

The most common type of batch off machine is the Horizontal type. It is a rubber dryer machine that is commonly being used by most of our clients. The horizontal batch off is consisted of 5 - 7 layers of belt laying horizontally so that the rubber sheet can lay on the belt. It comes with a ventilation system by fans along the conveyors.

Model	Layer	Conveyor's Motor (HP)	Sheet Width (mm)	Total Sheet Length (m)	Speed (m/min)	Dimension (mm)										
						A	I	B	C	D	E	F	G	W	L	H
YF-B0-575	3	1x3	500	16	20	575	1050	570	1700	6000	215	760	1760	1620	8485	2430
	5	1x5		575		1050	570	2000	6000	215	760	2250	1620	8785	2920	
	7	1x7		575		1050	570	2000	6000	215	760	3050	1620	8785	3720	
YF-B0-775	3	1x3	700	16	20	775	1050	570	1700	6000	215	760	1760	1820	8485	2430
	5	1x5		775		1050	570	2000	6000	215	760	2250	1820	8785	2920	
	7	1x7		775		1050	570	2000	6000	215	760	3050	1820	8785	3720	
YF-B0-975	3	1x3	900	16	20	975	1050	570	1700	6000	215	760	1760	2020	8485	2430
	5	1x5		975		1050	570	2000	6000	215	760	2250	2020	8785	2920	
	7	1x7		975		1050	570	2000	6000	215	760	3050	2020	8785	3720	

**The Above Specification is our Standard Specification.

***For Special Specification/ Dimension, Please contact our personnels.

YFM YONG FONG MACHINERY CO., LTD.

38/5 Moo 1 Leabkhlomgmunprarom Rd., Nadee, Aumpermuang Samutsakorn, Samutsakorn 74000.Thailand
Tel : +66 34 854716 to 7, +66 34 466282 to 3 Fax : +66 34 854718, +66 34 466345 yfmsales@gmail.com www.yfm.co.th