


OPEN KNEADER

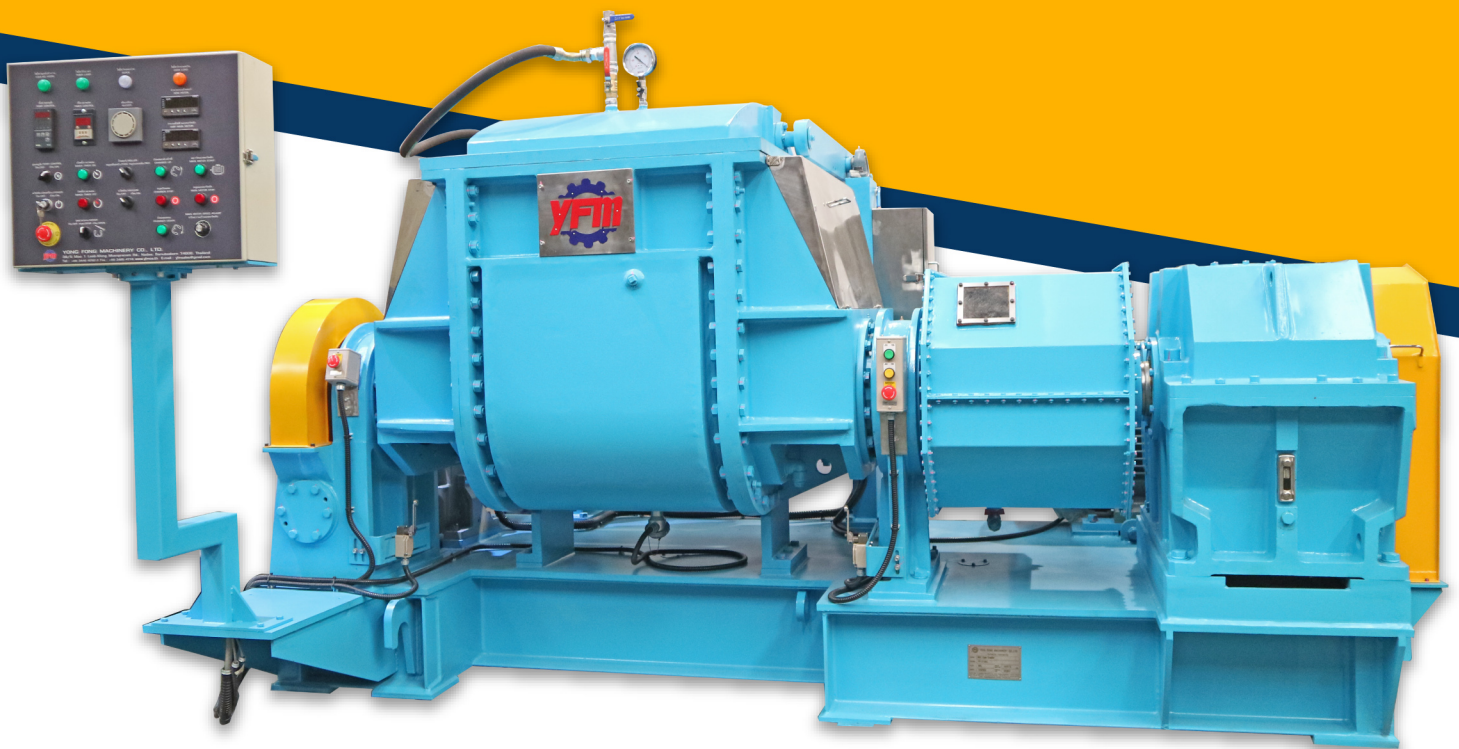

OPTIONS

Chamber Material :

- Standard (Steel)
- Stainless Steel

Rotor Blade :

- 2 Blades
- 4 Blades

Rotor Material :

- Standard (Steel)
- Stainless Steel

Bakelite Material :

- Standard
- Special (Imported)

Control :

- Touch Screen
- PLC

Power :

- Inverter



+66 34 854716 to 7

www.yfm.co.th



MACHINE SPECIFICATION



Overview Open Kneader is a closed system mixer as same as the previous machines. It is quite similar to Standard Dispersion Kneader in most of the aspects. However, there is no Ram press in this machine, so it is more suitable for mixing materials that have higher liquidity textures such as Butyl rubber, Glue, and other Liquid Material Type.

Model	YF-OK-50L	YF-OK-100L	YF-OK-200L	YF-OK-300L	YF-OK-600L	YF-OK-900L	YF-OK-1200L	YF-OK-2400L
Min Capacity (L)	50	100	200	300	600	900	1200	2400
Max Capacity (L)	85	170	340	500	1000	1500	2000	4000
Motor (HP)	15 - 30	20 - 50	30 - 75	40 - 100	60 - 100	75 - 125	100 - 150	175 - 250
Tilting Angle	140	140	140	140	140	140	140	140
Feeder Position	Front	Front	Front	Front	Front	Front	Front	Front
Chamber Motor (HP)	5	7.5	10	10	15	20	25	30
Cooling Water Pressure (MPa)	0.2 - 0.4	0.2 - 0.4	0.2 - 0.4	0.2 - 0.4	0.2 - 0.4	0.2 - 0.4	0.2 - 0.4	0.2 - 0.4
Machine Weight (Kg)	~ 4000	~ 6500	~ 8000	~ 9600	~ 11600	~15600	~ 24000	~ 38000

**The Above Specification is our Standard Specification.

***For Special Specification/ Dimension, Please contact our personnels.

YFM YONG FONG MACHINERY CO., LTD.

38/5 Moo 1 Leabkhlongmuenprarom Rd., Nadee, Aumpermuang Samutsakorn, Samutsakorn 74000.Thailand
Tel : +66 34 854716 to 7, +66 34 466282 to 3 Fax : +66 34 854718, +66 34 466345 yfmsales@gmail.com www.yfm.co.th